


ELECTRONIC BALLASTORS


UNIT: (mm)



$\phi d: 1.0 \pm 0.02\%$
 $F: 5.0 \pm 5\%$
 $L: 30.0 \text{ Min}$

Part No.	Curie Point	R ₂₅ (Ω)	Resistance Tol. (%)	V rated	Max. Working Voltage	Size $\phi D \times T$ (mm)
MZ31-1	75°C	100~2000	±20、±30	AC 220V	500~700V	6×5
MZ31-2	60°C	100~2000	±20、±30	AC 220V	500~700V	6×5
MZ31-3	45°C	100~2000	±20、±30	AC 220V	500~700V	6×5
MZ31A	70~110°C	100~400	±20、±30	AC 220V	500~700V	8×5
MZ31B	70~110°C	100~400	±20、±30	AC 220V	500~700V	13×7×12
MZ22	90~110°C	15~50	±20	AC 220V	270~350V	10~15×5

For TELEPHONE EXCHANGERS

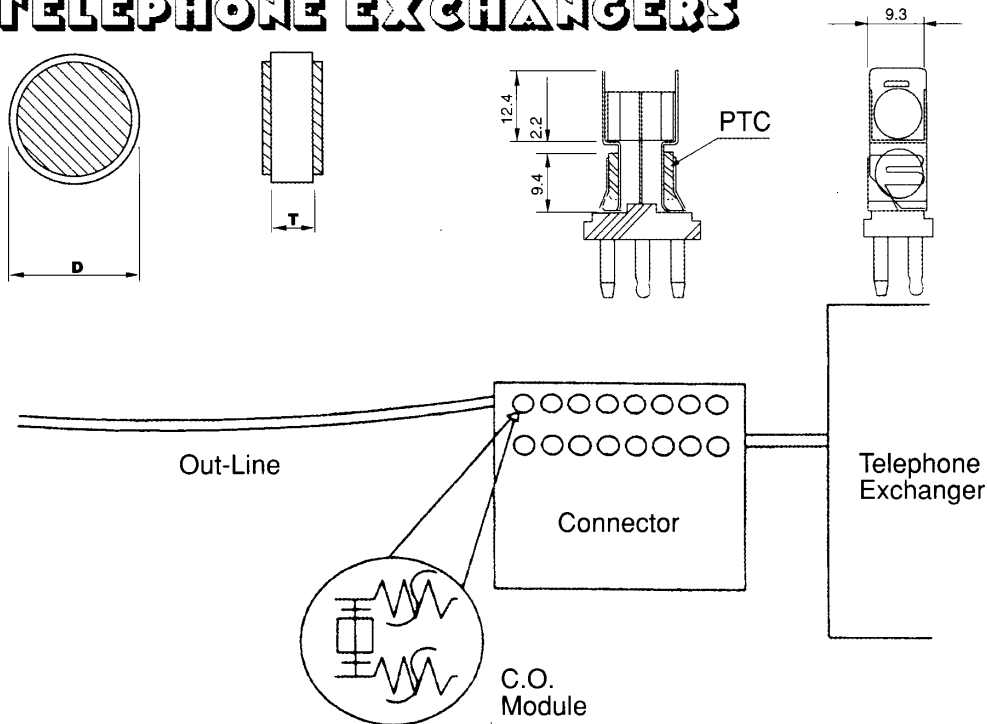

Part No.	R ₂₅ ±% (Ω)	V rated	N.O.C (mA)	Operation Current		Size $\phi D \times T$ (mm)
				2A-500mA	1A-500mA	
HE2515	15±20%	AC 220V	110mA, @25°C	0.5 Sec.	1.5 Sec.	8×2.5
HE2520	20±10%	AC 220V	110mA, @25°C	0.5 Sec.	1.5 Sec.	8×2.5
KC2215	15±20%	AC 220V	110mA, @40°C	0.5 Sec.	1.5 Sec.	8×2.5
KC2220	20±10%	AC 220V	110mA, @40°C	0.5 Sec.	1.5 Sec.	8×2.5
KC2230	30±17%	AC 220V	110mA, @40°C	0.5 Sec.	1.5 Sec.	8×2.5