

2.4GHz External Antenna

Product Number: AT2.4G-13295-7.0WT





1. Specification

Sample Photo	
	
A. Electrical Characteristics	
Frequency	2400 ~ 2500 MHz
S.W.R.	<= 2.0
Antenna Gain	7 dBi
Polarization	Linear
Impedance	50 Ohm
B. Material & Mechanical Characteristics	
Material of Radiator	Cu
Material of Plastic	Body: TPEE
Cable Type	RG-178
Connector Type	SMA Male Reverse
Connector Pull Test	>= 3 Kg
Connector Torque Test	520~1400 g.cm
C. Environmental	
Operation Temperature	- 40 °C ~ + 85 °C
Storage Temperature	- 40 °C ~ + 85 °C

2. Characteristics and Reliability Test

Test Items		Test Condition and Procedure	Requirements
C1	S.W.R.	Set DUT on Network Analyzer; make individual calibration to test	Directive DUT specification
C2	Antenna Gain	Set DUT on Antenna Chamber; make individual calibration to test	Directive DUT specification
M1	Vibration	MIL-STD-202G, 201A Amplitude: 0.03 inch (0.76mm); Freq: 10 to 55 Hz 3 directions; 2 hours for each direction	1. No Visual Damage 2. Frequency Tol.<= 5%
M2	Random Drop	Height: 1.5 Meter; 3 directions; 1 time for each direction	1. No parts separated 2. Frequency Tol.<= 5%
M3	Solderability	MIL-STD-202G, 210F, cond. A Solder iron: 350±10°C; Duration: 5 seconds	1. Mounted on PCB 2. No Visual Damage
M4	Terminal-Pull Test	MIL-STD-202G, 211A, cond. A Holding with individual specification; force applied to axis of terminal	1. Directive DUT specification 2. Frequency Tol.<= 5%
M5	Terminal-Torque Test	MIL-STD-202G, 211A, cond. E Holding with individual specification; applied clockwise and counterclockwise to the axis of terminal	1. Directive DUT specification 2. Frequency Tol.<= 5%
M6	Dimension	Inspection of dimension, color, material, package, surface process	Directive DUT specification
E1	Salt Spray	MIL-STD-202G, 101E, cond. B Temp: 35°C; RH: >= 95%; NaCl solution: >= 5%; Time: 48 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E2	Humidity	MIL-STD-202G, 103B, cond. B Temp: 40°C; RH: >= 95%; Time: 48 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E3	Thermal Shock	1 Cycle: - 40°C (30 minutes) to + 80°C (30 minutes) Cycles: 24	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E4	Life (High Temp.)	MIL-STD-202G, 108A, cond. A Temp: 85°C; Time: 96 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
R1	RoHS	With Reference to IEC 62321:2008 with flow chart	Directive RoHS 2002/95/EC
R2	PFOS	With Reference to USA EPA 3540C:1996 by LC/MS	Directive RoHS 2006/122/EC
R3	PFOA	With Reference to USA EPA 3540C:1996 by LC/MS	Directive RoHS 2006/122/EC


3. Antenna - S Parameter Test Data

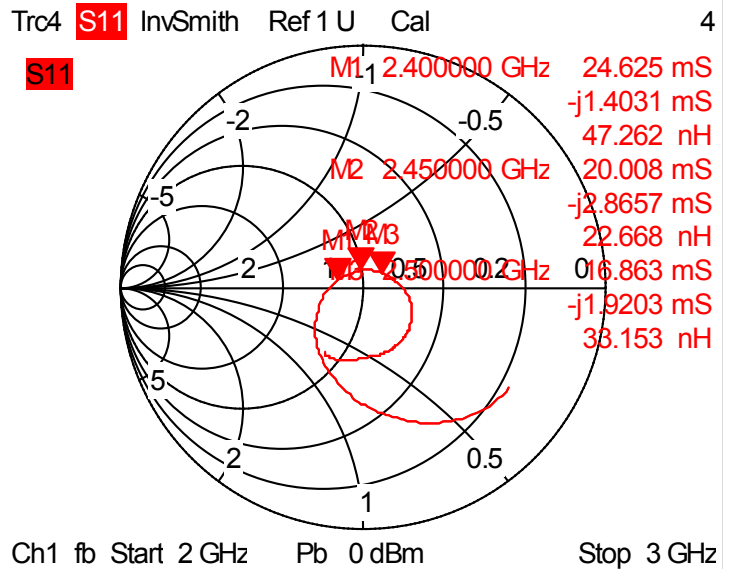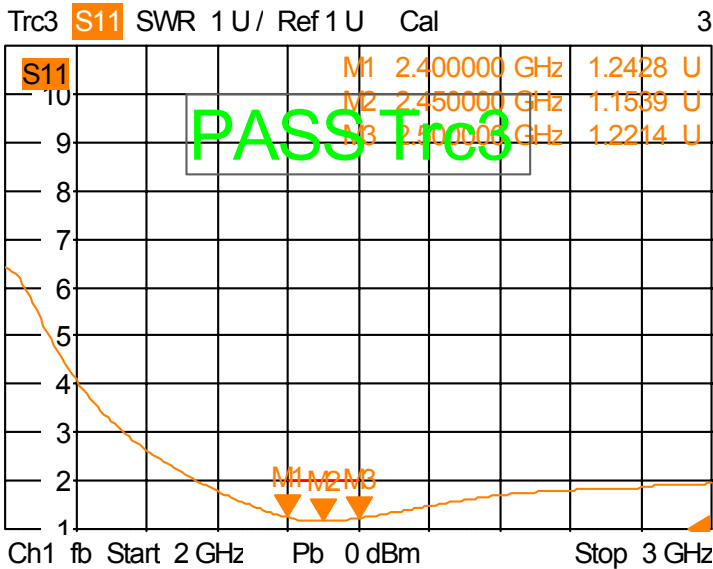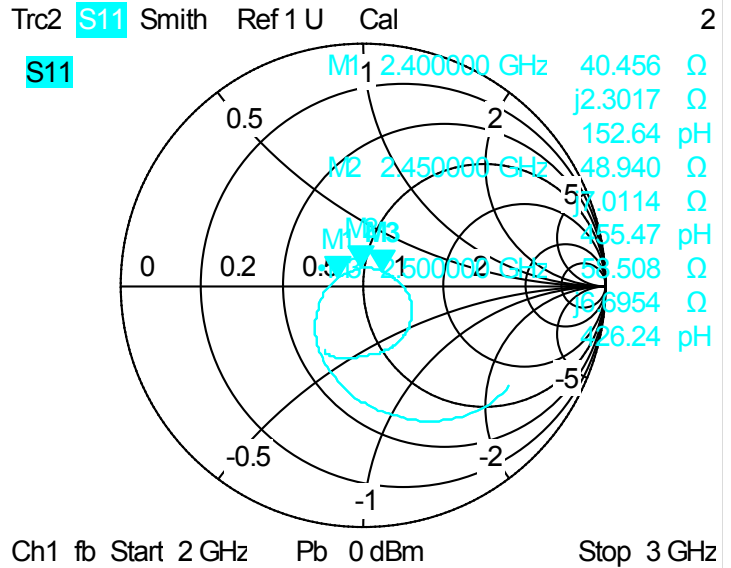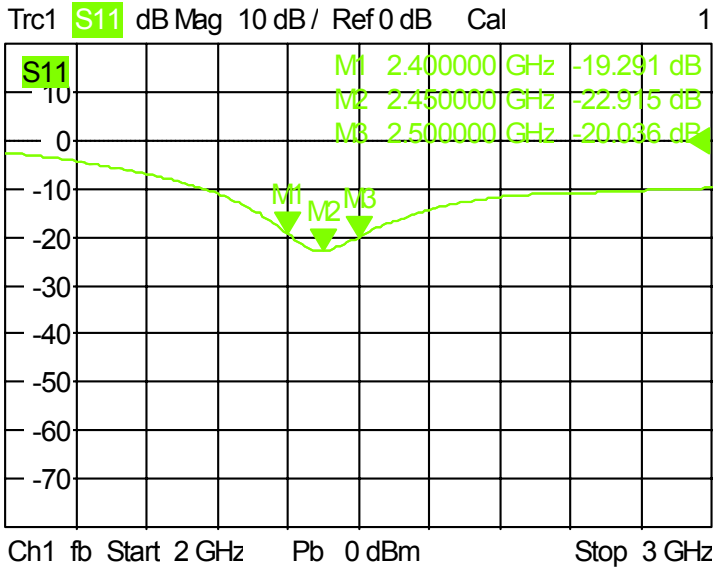

10/24/2015, 3:57 AM

4. Antenna - Radiation Pattern Test Data

Frequency	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
TRP (dBm)	-0.67	-0.66	-0.65	-0.69	-1	-0.79	-0.85	-0.79	-0.75	-0.93	-0.99
Peak EIRP (dBm)	5.45	5.54	5.5	5.66	5.57	5.77	5.77	5.83	5.94	5.77	5.68
E-Theta Peak Gain (dBi)	-16.7	-17.04	-17.4	-16.28	-17.45	-16.87	-19.06	-16.98	-18.24	-17.59	-16.26
E-Phi Peak Gain (dBi)	5.44	5.54	5.5	5.65	5.57	5.76	5.76	5.81	5.93	5.75	5.67
E-Total Peak Gain (dBi)	5.45	5.54	5.5	5.66	5.57	5.77	5.77	5.83	5.94	5.77	5.68
Directivity (dBi)	6.12	6.2	6.15	6.35	6.57	6.56	6.62	6.62	6.69	6.7	6.66
Efficiency (%)	85.64	85.95	86.07	85.25	79.39	83.29	82.31	83.37	84.21	80.73	79.66

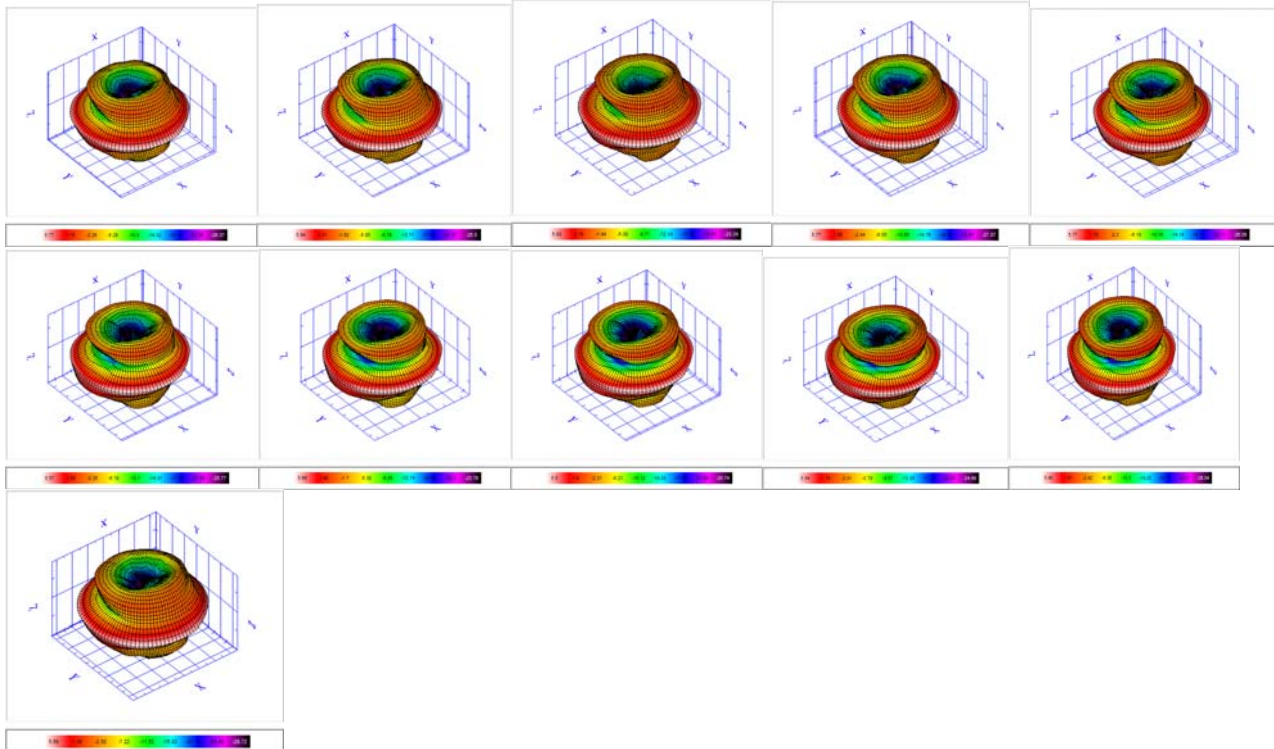

5. Mechanical Drawing

