


● SPECIFICATION

Type	XT324G
Frequency Range	11.0592 - 54.000MHz
Frequency Tolerance	±10 , 15 , 20 , 30 PPM (at 25°C)
Frequency Stability	±10 , 15 , 20 , 30 PPM (Ref. to 25°C)
Operation Temperature	-10°C ~ +70°C Typical
Storage Temperature	-40°C ~ +85°C
Load Capacitance	Series,9pF,10pF,12pF,15pF,18pF,20pF,30pF or Special requirement
Drive Level	15,30,50,100,200,500 μW or Special requirement
Series Resistance	See below
Shunt Capacitance	3pF max
Aging	±3PPM/year


● EQUIVALENT SERIES RESISTANCE

Frequency MHz	Model	E.S.R
11.0592-12.999MHz	Fundamental	100 Ω max.
13.000-16.000MHz	Fundamental	80 Ω max.
16.001-20.000MHz	Fundamental	50 Ω max.
20.001-30.000MHz	Fundamental	40 Ω max.
30.001-54.000MHz	Fundamental	30 Ω max.

● DIMENSIONS(mm)

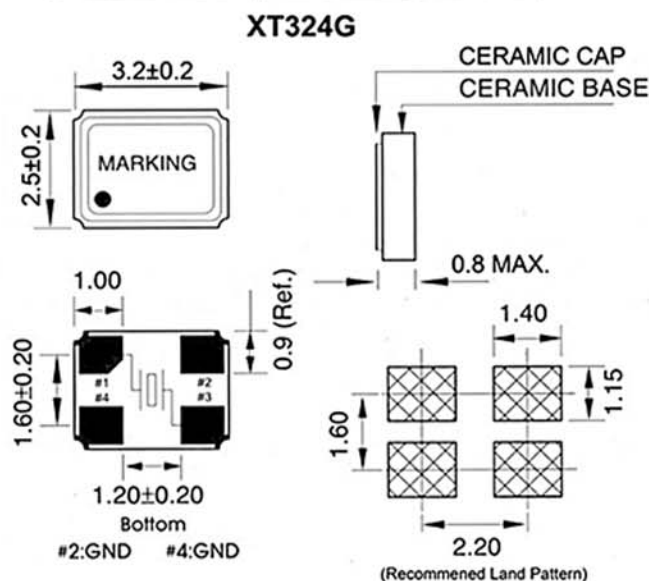

● REEL PACKING(mm)

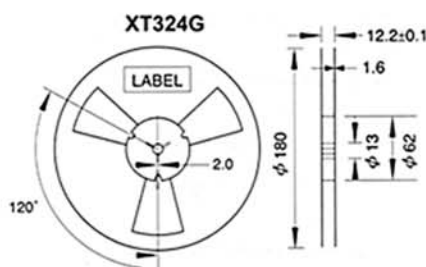

● TAPE SPECIFICATION(mm)

