


● SPECIFICATION

Type	XT754
Frequency Range	6.0-125.0MHz
Frequency Tolerance	±10PPM~±50PPM
Frequency Stability	±10PPM~±50PPM
Operation Temperature	-10°C ~ + 70°C Typical
Storage Temperature	- 40°C ~ +85 °C
Load Capacitance	Series,18pF,20pF,30pF or Special
Drive Level	15μW, 30μW, 100μW, or Special
Series Resistance	See below
Shunt Capacitance	7pF max
Aging	±1PPM,2PPM,3PPM/year

● DIMENSIONS(mm)

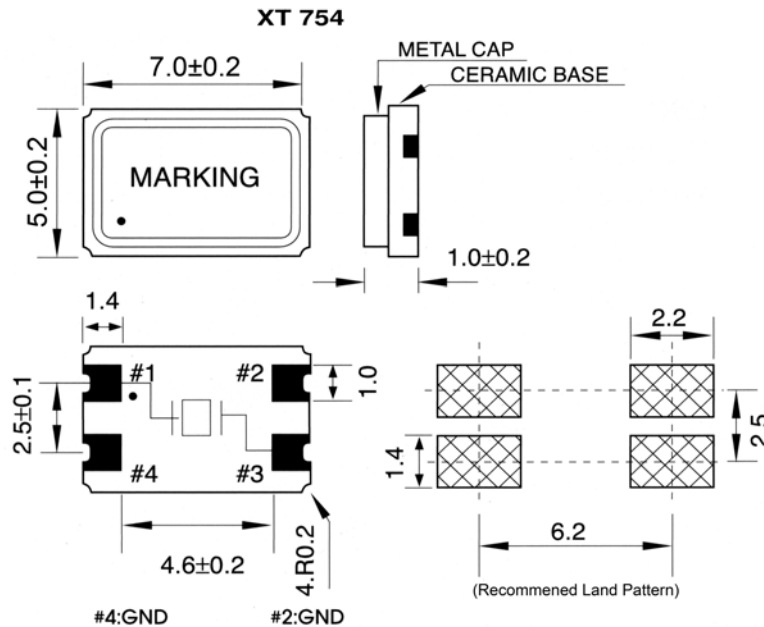

● EQUIVALENT SERIES RESISTANCE

Frequency (MHz)	ESR(Ω) max
Fundamental	
6.000M~10.000M	80
10.000M~54.000M	60
3rd Overtone	
40.000M~100.000M	100

● TAPE SPECIFICATION(mm)

