


OSC-S21L RTC Series : Low Power RTC SMD Crystal Clock Oscillator 2.0x1.6 mm 32.768KHz

● SPECIFICATION


Model	OSC-S21L Low Power RTC Series
Frequency range	32.768KHz
Storage temperature range	- 55°C ~ + 125°C
Operation temperature range	- 10°C ~ + 70°C , - 40°C ~ + 85°C
Frequency stability	±20 ppm ~ ±50ppm
Power supply voltage	1.8V DC ±5%
Current consumption	1.8uA max
Output level	C-MOS
Load	15pF max.
Output voltage level	V _{OL} : 10% V _{dd} max. / V _{OH} : 90% V _{dd} min.
Start-up Time	20 m sec. max.
Duty cycle	40% ~ 60% at 1/2 V _{dd}
RISE / FALL TIME	15nS max
AGING	±3ppm / Year

● DIMENSIONS (mm)

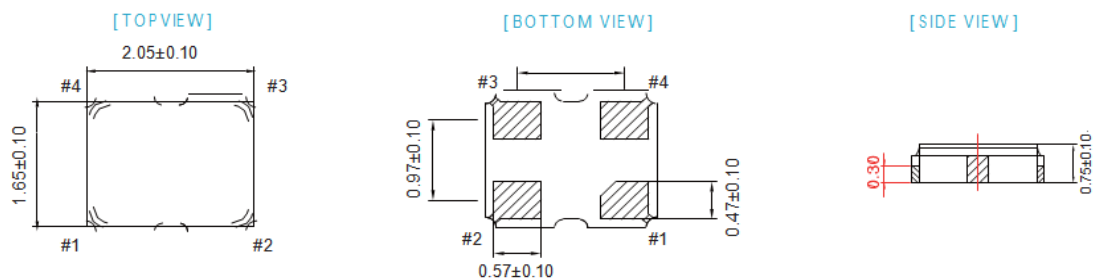


#1: E/D #3: OUTPUT
#2: GND #4: VDC

● OUTPUT WAVEFORM

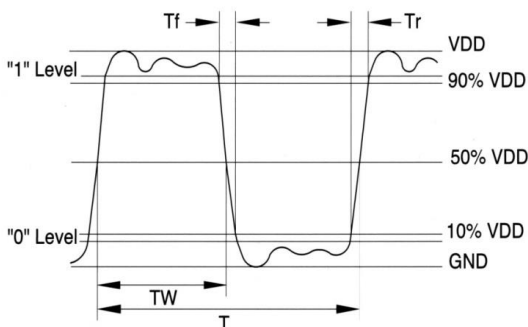

● TEST CIRCUIT

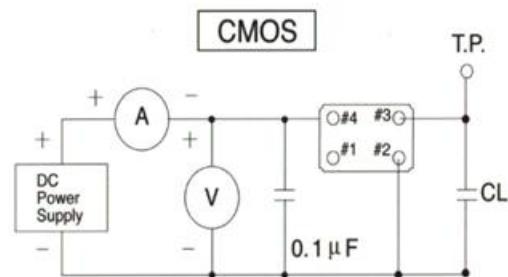

*** Because S21 series has no by pass capacitor.
So, we recommend our customer to use capacitor 0.1μF
in join Vcc and GND.