


RoHS
Compatible

CUSTOMER	
PART NO	

REV.	ORDER NO	DATE
△A	New Release	2017.01.03
△B	Change SMA	2018.12.13

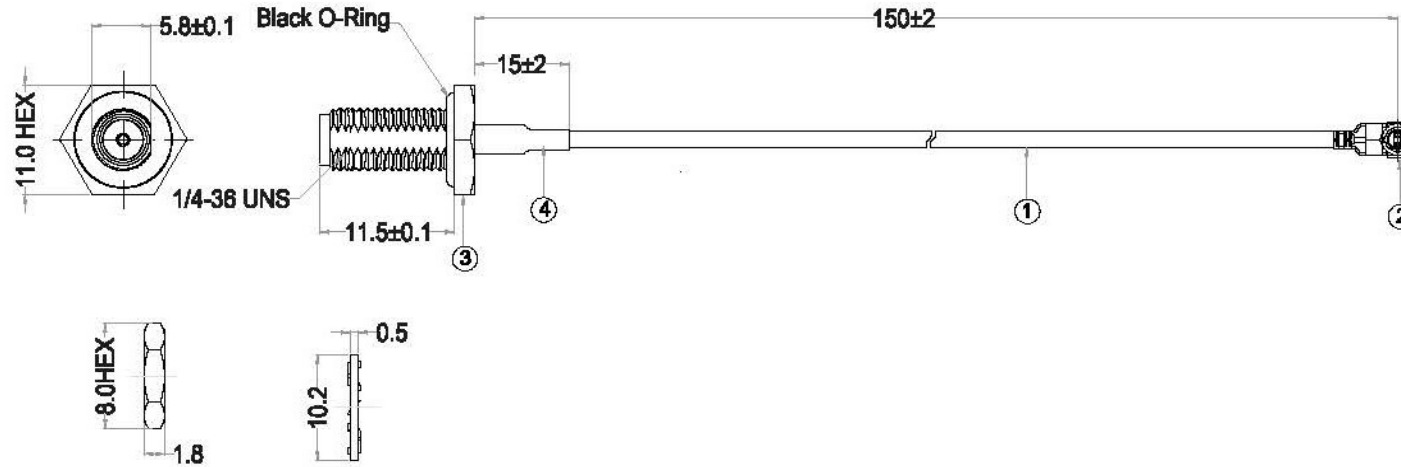


Note:

1. Electrical Properties
 - 1.1 Frequency Range: DC-6GHz
 - 1.2 Impedance: 50Ω
 - 1.3 VSWR: <1.3 @ 0.1GHz ~ 3GHz, <1.5 @ 3GHz ~ 6GHz.
2. Mechanical Properties
 - 2.1 Pull Force: >1.0Kg For I-PEX MHF Plug
 - 2.2 Pull Force: >3Kg For SMA Connector.
3. Package: Bulk Package

2	Tube	Heat Shrink Tube, Black, Ø3.0	1
2	Connector	SMA Female, W/O-ring, Gold Plated	1
2	Connector	I-PEX MHF Plug, 20278-112R-13 or EQ	1
1	Cable	RF 1.13 Black Coaxial Cable	/
NO	PARTNAME	DESCRIPTION	Q.TY

YIC Yuechung International Corp.

PART NAME: I-PEX To SMA Cable, L=150MM			
PART NO.: IPEX-1.13B-150-SMAF		DATE: 2016-12-13	
APPROVED BY	CHECKED BY	DESIGNED BY	 Tolerance X.X ±0.50 X.XX±0.15 X° ±3°
Jim. Yang	Zhang.Yong	Rain. Li	
			UNITS: mm SCALE: None REVISION: A