



● SPECIFICATION

Model	OSC-S22 RTC Low Power Series		
Frequency range	32.768KHz		
Storage temperature range	- 55°C ~ + 125°C		
Operation temperature range	- 10°C ~ + 70°C , - 40°C ~ + 85°C		
Frequency stability	±20 ppm ~ ±50ppm		
Power supply voltage	3.3V DC ±10%	2.5V DC ±5%	1.8V DC ±5%
Current consumption	18uA max	18uA max	18uA max
Output level	C-MOS		
Load	15pF max.		
Output voltage level	V _{OL} : 10% V _{dd} max. / V _{OH} : 90% V _{dd} min.		
Duty cycle	40% ~ 60% at 1/2 V _{dd}		
RISE / FALL TIME	15nS max	15nS max	15nS max
AGING	±3ppm / Year		


● DIMENSIONS (mm)

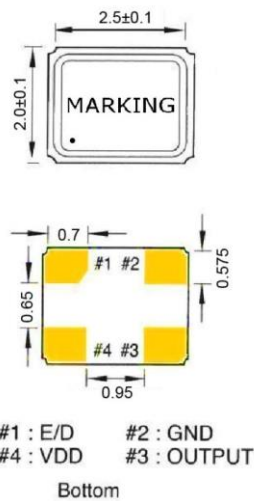


S22

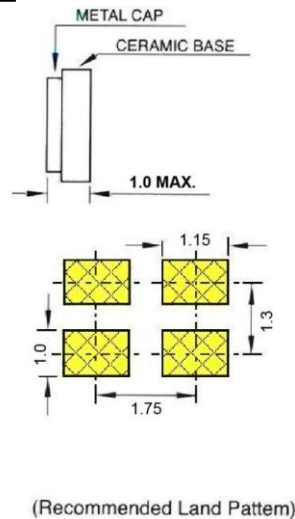

● OUTPUT WAVEFORM

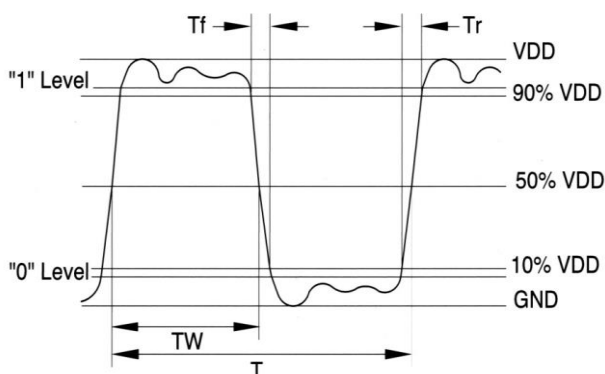

● TEST CIRCUIT

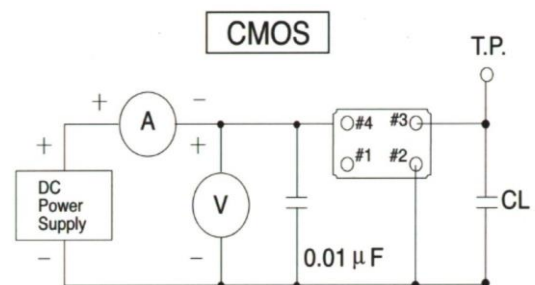

*** Because S22 series has no by pass capacitor.
So, we recommend our customer to use capacitor 0.01μF
in join Vcc and GND.