


● SPECIFICATION


Application	Function / Band	Frequency	BW(MHz)	IL typ.(dB)	Power(dBm)	Size	Package
2.4G SAW	WIFI/WLAN/BT	2401-2483	80	2.4 / 1.6	10	1.1 x 0.9 5Pads	SF105
		2402.5-2471.5	70	1.6	10	1.1 x 0.9 5Pads	SF105
		2442	84	2.3	10	1.4 x 1.1 5Pads	SF115
		2421-2500	80	2	10	1.4 x 1.1 5Pads	SF115
		2401-2480	80	2.2 / 2.0	10	0.9 x 0.7 4Pads	SF114
RX SAW	1	2110-2170	7	2.6 / 2.3	10	0.9 x 0.7 4Pads	SF114
	3	1842.5	75	2	10	1.1 x 0.9 5Pads	SF105
	7	2620-2690	26	1.9 / 2.3	10	0.9 x 0.7 4Pads	SF114
	14	758 - 768	10	1.9	10	1.1 x 0.9 5Pads	SF105
	25	1930.6-1994.4	60	3	10	1.1 x 0.9 5Pads	SF105
	26	859-894	50	1.7	10	1.1 x 0.9 5Pads	SF105
	29	717.3-727.8	10	2.5	10	1.1 x 0.9 5Pads	SF105
	32	1452-1496	40	3	10	1.1 x 0.9 5Pads	SF105
	38	2570-2640	70	2.4	10	1.1 x 0.9 5Pads	SF105
TX SAW	41	2605	100	1.9	10	1.4 x 1.0 5Pads	SF115
	40	2300-2400	100	2.0- 2.1	10	1.1x 0.9 5Pads	SF105
	41(110M)	2545-2655	100	3	10	1.4 x 1.1 5Pads	SF115
	41(120M)	2535-2655	120	2.5	10	1.4 x 1.1 5Pads	SF115
	41(140M)	2535-2675	140	1.9	10	1.1 x 0.9 5Pads	SF105
	41(194M)	2496-2690	200	2.5	10	1.4 x 1.1 5Pads	SF115
Dual SAW	1+3	1842.5 / 2140	25/30	1.5 / 1.6	12	1.5 x 1.1 6Pads	SF116
	34+39	1900 / 2017.5	25/30	1.6 / 1.8	12	1.5 x 1.1 6Pads	SF116
	39+41 (194M)	1900 / 2595	25/30	1.6 / 1.8	12	1.5 x 1.1 6Pads	SF116
	66+3	1842.5 / 2155	25/30	1.5 / 1.5	12	1.5 x 1.1 6Pads	SF116
	1+41	2140 / 2593	25/30	1.3 / 1.4	12	1.5 x 1.1 6Pads	SF116
	25+66(2+66)	1962.5 / 2155	25/30	1.6 / 1.6	12	1.5 x 1.1 6Pads	SF116
Triple SAW	2+66 quadruplexer	1745/2155/1880/1960	25/30	2.0/2.0/2.0/2.0	20	2.0 x 1.6 9Pads	SF219
	1+3+7	2140/1842.5/2655	25/30	1.8/1.8/1.8	15	1.8 x 1.4 8Pads	SF118
	2+66+7 Rx	1960/2155/2655	25/30	11.8/1.8/1.8	15	1.8 x 1.4 8Pads	SF118
	3+66+41 Rx	1842/2155/2593	25/30	11.8/1.8/1.9	15	1.8 x 1.4 8Pads	SF118
Extractor(SE series)	GPS	1580	25/30	1.5	15	1.8 x 1.4 8Pads	SF118
	WiFi	2442	25/30	1.8	15	1.8 x 1.4 8Pads	SF118

● DIMENSIONS (mm)

SF105

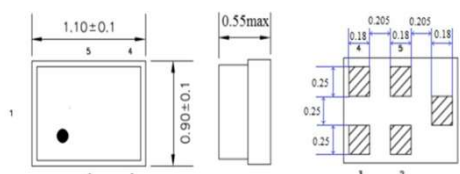

SF116

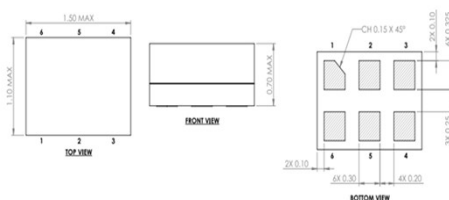

SF219

